



CS






TYPICAL APPLICATIONS	Hairdryers
FUNCTIONS	■ 2x SPST (3 positions 0-0/0-1/1-1)
CYCLE No.	50.000
CUT OUT	See drawing
AMBIENT TEMPERATURE	85 °C
GWT	850 °C





DRAWING



TERMINAL

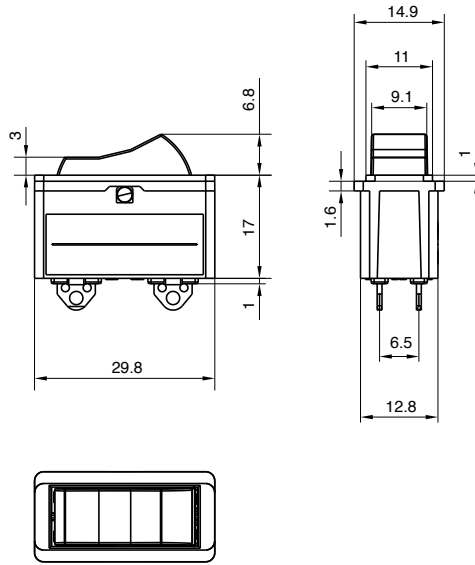

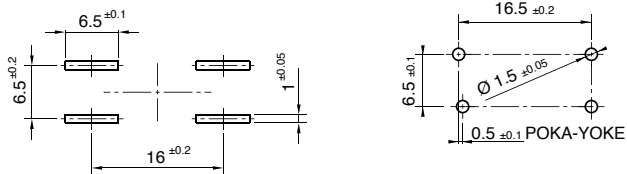

FUNCTION	RATING	BODY COLOUR	ROCKER COLOUR	MARKING	MARKING COLOUR
<p>1</p>	<p>2</p> <p>16 A / 250 VAC 10 A / 250 VAC - 5E4 T85/55 °C µ disconnection EN 61058-1</p> <p>16 A GP / 250 VAC 10 A GP / 250 VAC - 3E4 T85/55 °C µ disconnection UL 61058-1</p>	<p>1 ■</p> <p>black</p>	<p>1 ■</p> <p>black</p>	<p>0 </p> <p>A </p> <p>B </p> <p>X </p>	<p>0 <input type="checkbox"/></p> <p>none</p> <p>2 <input type="checkbox"/></p> <p>white</p> <p>X <input type="checkbox"/></p> <p>custom</p>
<p>1</p>					
<p>1</p>					
<p>1</p>					